

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 386 950 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

04.02.2004 Bulletin 2004/06

(51) Int Cl.7: C09J 7/02, C08K 9/12,

C09C 1/00, C09J 133/08

(21) Application number: 03016899.1

(22) Date of filing: 24.07.2003

(84) Designated Contracting States:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR

HU IE IT LI LU MC NL PT RO SE SI SK TR

Designated Extension States:

AL LT LV MK

(72) Inventors:

• Miyano, Akikio

Ibaraki-shi, Osaka (JP)

• Yokoyama, Junji

Ibaraki-shi, Osaka (JP)

• Soeda, Yoshikazu

Ibaraki-shi, Osaka (JP)

(30) Priority: 29.07.2002 JP 2002219567

(71) Applicant: NITTO DENKO CORPORATION
Osaka (JP)


(74) Representative: Grünecker, Kinkeldey,
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

(54) Pressure-sensitive adhesive tape

(57) A pressure-sensitive adhesive tape contains a substrate and a pressure-sensitive adhesive layer disposed on at least one side of the substrate, wherein the

substrate contains colored layers containing a white layer, a layer of a color other than white and black, and a black layer which are superposed in this order.

FIG. 1

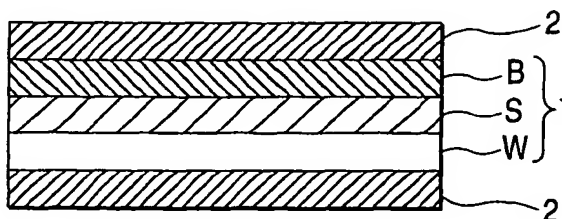

EP 1 386 950 A1

Description**FIELD OF THE INVENTION**

5 [0001] The present invention relates to a pressure-sensitive adhesive tape. The pressure-sensitive adhesive tape of the invention functions to reflect light and shut off light rays having specific wavelengths. It is useful as a pressure-sensitive adhesive tape for fixing a liquid-crystal display module unit to a backlight unit in fabricating, for example, a liquid-crystal display (LCD) of the internal/external dual lighting type which is suitable for use in applications such as cell phones and PDAs.

BACKGROUND OF THE INVENTION

15 [0002] LCDs of the internal/external dual lighting type which are employed in cell phones and the like include a liquid-crystal display module unit and a backlight unit which are fixed to each other with a pressure-sensitive adhesive tape as shown in Fig. 6. This pressure-sensitive adhesive tape is required to have the property of reflecting light and the property of shutting off light having specific wavelengths. Light-reflecting properties are necessary for reflecting the light from the backlight to thereby enhance luminance and reduce the power consumption based on the effective utilization of reflected light. On the other hand, light-shutting properties are necessary for inhibiting the light from the backlight from leaking out to the LCD surface to cause viewing failures.

20 [0003] Pressure-sensitive adhesive tapes which reconcile light-reflecting properties and light-shutting properties have hitherto been investigated. Pressure-sensitive adhesive tapes of this kind generally have a colored layer disposed on one side of the substrate film or have a colored pressure-sensitive adhesive layer. In general, a white layer is disposed on the backlight side in order to reflect the light from the backlight, and a black layer is disposed on the liquid-crystal display module side in order to prevent the light from leaking out to the LCD surface. For example, a pressure-sensitive adhesive tape employing a substrate film colored white has a transparent pressure-sensitive adhesive layer disposed on the backlight side and has a black layer or black pressure-sensitive adhesive layer disposed on the liquid-crystal display module side. A pressure-sensitive adhesive tape employing a substrate film colored black has a white layer or white pressure-sensitive adhesive layer disposed on the backlight side and has a transparent pressure-sensitive adhesive layer on the liquid-crystal display module side. Furthermore, a pressure-sensitive adhesive tape employing a transparent substrate film has a white layer or white pressure-sensitive adhesive layer disposed on the backlight side and has a black layer or black pressure-sensitive adhesive layer disposed on the liquid-crystal display module side.

30 [0004] However, in order to reconcile light-reflecting properties and light-shutting properties with such a pressure-sensitive adhesive tape, it is necessary to superpose many colored layers or to form colored layers thickly. This has resulted in a problem that the pressure-sensitive adhesive tape comes to have an increased total thickness and be unable to conform to thickness and weight reduction in cell phones and the like.

SUMMARY OF THE INVENTION

40 [0005] An object of the invention is to provide a pressure-sensitive adhesive tape which is usable for fixing a liquid-crystal display module unit to a backlight unit in fabricating an LCD, and which can function to reflect light and shut off light even when it has a thickness capable of conforming to thickness and weight reduction.

[0006] Another object of the invention is to provide a liquid-crystal display which includes a liquid-crystal display module unit and a backlight unit fixed thereto with the pressure-sensitive adhesive tape. Still another object of the invention is to provide a pressure-sensitive adhesive tape substrate for use in the pressure-sensitive adhesive tape.

45 [0007] The present inventors made intensive investigations in order to overcome the problem. As a result, they have found that those objects can be accomplished with the pressure-sensitive adhesive tape described below. The invention has thus been achieved.

50 [0008] The invention relates to a pressure-sensitive adhesive tape which comprises a substrate and a pressure-sensitive adhesive layer disposed on at least one side of the substrate,

wherein the substrate comprises colored layers comprising a white layer, a layer of a color other than white and black, and a black layer which are superposed in this order.

55 [0009] In the pressure-sensitive adhesive tape of the invention, a layer of a color other than white and black has been disposed between a white layer and a black layer. Due to this layer arrangement, the absorption by the black layer of the light which has passed through the white layer can be lessened and, hence, the reflectance on the white layer is improved. As a result, when this pressure-sensitive adhesive tape is used for fixing a liquid-crystal display module unit to a backlight unit in fabricating an LCD of the internal/external dual lighting type, then a heightened luminance can be attained. In addition, since there is no need of superposing many colored layers or forming colored

layers thickly, the pressure-sensitive adhesive tape can have a reduced total thickness and conform to thickness and weight reduction. On the other hand, since the black layer has light-shutting properties, the light from the backlight can be inhibited from leaking out to the LCD surface to cause viewing failures.

[0010] In a preferred embodiment of the pressure-sensitive adhesive tape, the substrate comprises a supporting substrate and colored layers, wherein the colored layers are a white layer, a layer of a color other than white and black, and a black layer which are superposed in this order from the supporting substrate side. In this pressure-sensitive adhesive tape, the supporting substrate preferably is a transparent substrate film. A white substrate film also is preferred as the supporting substrate in this pressure-sensitive adhesive tape.

[0011] In another preferred embodiment of the pressure-sensitive adhesive tape, the substrate comprises a supporting substrate and colored layers, wherein the supporting substrate is a white substrate film and the colored layers are a layer of a color other than white and black and a black layer which are superposed in this order from the white substrate film side.

[0012] In the pressure-sensitive adhesive tape, the layer of a color other than white and black preferably is a silver layer. Although the color other than white and black is not particularly limited, silver is preferred because the pressure-sensitive adhesive tape containing a silver layer can exhibit light-shutting properties and light-reflecting properties in steps.

[0013] The pressure-sensitive adhesive tape is suitable for use in fixing a liquid-crystal display module unit to a backlight unit. This pressure-sensitive adhesive tape for fixing is used in such a manner that the black layer is disposed on the liquid-crystal display module unit side and the white layer is disposed on the backlight unit side.

[0014] The invention further relates to a liquid-crystal display including a liquid-crystal display module unit and a backlight unit, wherein the display module unit and the backlight unit being fixed to each other with the pressure-sensitive adhesive tape described above.

[0015] The invention furthermore relates to a pressure-sensitive adhesive tape substrate which comprises colored layers comprising a white layer, a layer of a color other than white and black, and a black layer which are superposed in this order, the substrate being for use in the pressure-sensitive adhesive tape described above.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016]

Fig. 1 is a sectional view of one embodiment of the pressure-sensitive adhesive tape according to the invention.
Fig. 2 is a sectional view of another embodiment of the pressure-sensitive adhesive tape according to the invention.
Fig. 3 is a sectional view of still another embodiment of the pressure-sensitive adhesive tape according to the invention.

Fig. 4 is a sectional view of a further embodiment of the pressure-sensitive adhesive tape according to the invention.
Fig. 5 is a sectional view of still a further embodiment of the pressure-sensitive adhesive tape according to the invention.

Fig. 6 is a diagrammatic view illustrating the use of a pressure-sensitive adhesive tape for fixing a liquid-crystal display module unit to a backlight unit.

Description of Reference Numerals and Signs

[0017]

1: substrate
11: colored layers
12: supporting substrate
W: white layer
S: layer of color other than white and black
B: black layer
2: pressure-sensitive adhesive layer

DETAILED DESCRIPTION OF THE INVENTION

[0018] The pressure-sensitive adhesive tape of the invention will be explained below by reference to drawings. The pressure-sensitive adhesive tape of the invention comprises a substrate 1 and a pressure-sensitive adhesive layer 2 disposed on at least one side of the substrate 1. The pressure-sensitive adhesive tape shown in Fig. 1 comprises a substrate 1 and a pressure-sensitive adhesive layer 2 disposed on each side of the substrate 1. The substrate 1

comprises a white layer (hereinafter referred to also as "W layer"), a layer of a color other than white and black (hereinafter referred to also as "S layer"), and a black layer (hereinafter referred to also as "B layer") which are superposed in this order. The pressure-sensitive adhesive tape of the invention can be used in a sheet form.

[0019] The colored layers in the invention can be expressed in terms of chromaticity, which can be expressed by the value of L in L-a-b values determined with a colorimeter. The white layer (W layer) is a layer having a chromaticity L, as measured with a colorimeter, in the range of 92 ± 5 , while the black layer (B layer) is a layer having a chromaticity L, as measured with a colorimeter, in the range of 25 ± 10 .

[0020] The pressure-sensitive adhesive tape of the invention is not particularly limited as long as the substrate 1 comprises the W layer, S layer, and B layer in this order. Examples thereof include pressure-sensitive adhesive tapes in which the substrate 1 comprises a supporting substrate 12 and colored layers 11 as shown in Figs. 2 to 5.

[0021] The pressure-sensitive adhesive tape shown in Fig. 2 includes a 11W layer, a 11S layer, and a 11B layer which have been formed in this order as colored layers 11 from the supporting substrate 12 side. The pressure-sensitive adhesive tape shown in Fig. 4 includes a 11B layer, a 11S layer, and a 11W layer which have been formed in this order as colored layers 11 from the supporting substrate 12 side. In Figs. 2 and 4, the supporting substrate 12 may be a transparent substrate film. Namely, the substrate 1 may include a transparent layer as long as it comprises a W layer, S layer, and B layer in this order.

[0022] In the pressure-sensitive adhesive tape shown in Fig. 2, the supporting substrate 12 can be a white substrate film 12W so that this supporting substrate 12 itself serves as a W layer. In the pressure-sensitive adhesive tape shown in Fig. 4, the supporting substrate 12 can be a black substrate film 12B so that this supporting substrate 12 itself serves as a B layer. Namely, as long as the substrate 1 comprises a W layer, an S layer, and a B layer in this order, the W layer, S layer, and B layer each may consist of a single layer or may be composed of two or more layers.

[0023] The pressure-sensitive adhesive tape shown in Fig. 3 includes a 11S layer and a 11B layer which have been formed in this order as colored layers 11 from the supporting substrate 12 side. In Fig. 3, the supporting substrate 12 is a white substrate film 12W so that the supporting substrate 12 itself serves as a W layer. The pressure-sensitive adhesive tape shown in Fig. 5 includes a 11S layer and a 11W layer which have been formed in this order as colored layers 11 from the supporting substrate 12 side. In Fig. 5, the supporting substrate 12 is a black substrate film 12B so that the supporting substrate 12 itself serves as a B layer.

[0024] In the pressure-sensitive adhesive tape of the invention, the B layer contributes to light-shutting properties, while the W layer contributes to light-reflecting properties. In general, obtaining light-reflecting properties with a W layer is more difficult than obtaining light-shutting properties with a B layer. Because of this, a preferred embodiment of the pressure-sensitive adhesive tape of the invention is the pressure-sensitive adhesive tape shown in Fig. 2 or 3 in which the supporting substrate 12 is a white substrate film 12W.

[0025] Examples of other embodiments of the pressure-sensitive adhesive tape of the invention include a pressure-sensitive adhesive tape which includes: a supporting substrate 12 which is a colored film 12S so that the supporting substrate 12 itself serves as an S layer; and a 11B layer and a 11W layer which are disposed as colored layers on one side and the other side, respectively, of the supporting substrate 12. Examples thereof further include a pressure-sensitive adhesive tape including a supporting substrate 12 which itself is composed of a W layer, an S layer, and a B layer which are superposed in this order.

[0026] The material of the supporting substrate 12 is not particularly limited, and various kinds of materials can be used. Examples thereof include polyesters such as poly(ethylene terephthalate), poly(butylene terephthalate), and poly(ethylene naphthalate); polyolefins such as polyethylene and polypropylene; poly(vinyl alcohol); and poly(vinylidene chloride). Preferred of these from the standpoints of transparency, strength, etc. are polyesters such as poly(ethylene terephthalate).

[0027] The thickness of the supporting substrate 12 is not particularly limited. However, from the standpoints of thickness and weight reduction and processability, the thickness thereof is generally about from 4 to 70 μm , preferably from 10 to 50 μm . In the case where a white substrate film, black substrate film, or the like is to be used as the supporting substrate 12, a pigment or the like is incorporated according to the color.

[0028] The colored layers 11 each can be formed by applying a composition comprising a pigment, a binder, and a solvent to the supporting substrate 12. As the binder can be used any of binders for use in colored-layer formation without particular limitations. Examples thereof include polyurethanes, phenolic resins, epoxy resins, urea-melamine resins, and poly(methyl methacrylate). The solvent is suitably selected according to the kinds of the pigment and binder. The pigment is suitably selected according to the color of each of the W layer, S layer, and B layer.

[0029] The total thickness of the colored layers 11 is generally preferably about from 1 to 10 μm . The thickness of each colored layer is generally preferably about from 1 to 2 μm . For forming the colored layers, techniques heretofore in use for colored-layer formation, such as, e.g., gravure printing, flexography, or offset printing, can be employed without particular limitations.

[0030] Pigments to be used for coloring in forming the supporting substrate 12 and colored layers 11 are a white pigment for the W layer and a black pigment for the B layer. Examples of the white pigment include titanium dioxide,

zinc white, and white lead. Examples of the black pigment include carbon black, acetylene black, vegetable black, and graphite.

[0031] The color of the S layer is not particularly limited as long as it is neither white nor black. For example, the S layer can be a layer colored silver, blue, or red. Preferred of these colors of the S layer is silver because the silver S layer enables the pressure-sensitive adhesive tape to exhibit light-shutting properties and light-reflecting properties in steps. Examples of silver pigments include aluminum. The S layer preferably is one having a chromaticity L, as measured with a colorimeter, in the range of 70 ± 10 .

[0032] As the pressure-sensitive adhesive constituting each pressure-sensitive adhesive layer 2 can be used, without particular limitations, any of various pressure-sensitive adhesives including acrylic pressure-sensitive adhesives, rubber-based pressure-sensitive adhesives, and silicone pressure-sensitive adhesives.

[0033] Especially preferred examples of the acrylic pressure-sensitive adhesives are ones comprising as the base polymer either a homopolymer of an alkyl (meth) acrylate in which the alkyl group has 1 to 18 carbon atoms or a copolymer of the alkyl (meth) acrylate with one or more other copolymerizable monomers, e.g., functional monomers. The term "(meth)acrylate" as used herein refers to "acrylate and/or methacrylate", and the term "(meth) acrylamide" as used herein refers to "acrylamide and/or methacrylamide".

[0034] Examples of the alkyl (meth)acrylate include methyl acrylate, ethyl acrylate, butyl acrylate, isobutyl acrylate, hexyl acrylate, octyl acrylate, 2-ethylhexyl acrylate, isooctyl acrylate, decyl acrylate, isodecyl acrylate, lauryl acrylate, stearyl acrylate, and the alkyl methacrylates corresponding to these acrylates.

[0035] Examples of the functional monomers include monomers having one or more hydroxyl groups, monomers having one or more carboxyl groups, and monomers having one or more amide groups. Examples of the monomers having one or more hydroxyl groups include hydroxyalkyl (meth) acrylates such as 2-hydroxyethyl (meth) acrylate and hydroxypropyl (meth)acrylate. Examples of the monomers having one or more carboxyl groups include α, β -unsaturated carboxylic acids such as acrylic acid, methacrylic acid, and crotonic acid; monoalkyl maleates such as butyl maleate; unsaturated dibasic acids such as maleic acid, fumaric acid, and itaconic acid; and dibasic acid anhydrides such as maleic anhydride. Examples of the monomers having one or more amide groups include acrylamide, alkyl(meth) acrylamides such as dimethyl(meth) acrylamide and diethyl (meth) acrylamide, N-alkoxymethyl(meth) acrylamides such as N-butoxymethyl(meth)acrylamide and N-ethoxymethyl(meth)acrylamide, and diacetone (meth)acrylamide. Examples of monomers having one or more amino groups include dimethylaminoethyl (meth)acrylate. Other usable copolymerizable monomers include vinyl acetate, styrene, α -methylstyrene, vinyl chloride, acrylonitrile, ethylene, propylene, and the like.

[0036] In producing a copolymer of an alkyl (meth)acrylate, it is preferred to copolymerize monomers so that the content of alkyl (meth) acrylate units in the resultant copolymer is 50% by weight or higher based on all monomer units. When the proportion of alkyl (meth)acrylate units is lower than 50% by weight, there is the possibility that the pressure-sensitive adhesive might show insufficient pressure-sensitive adhesive properties. The proportion of alkyl (meth)acrylate units more preferably is 60% by weight or higher.

[0037] Besides the base polymer, other ingredients such as, e.g., a tackifier and a crosslinking agent are incorporated into the pressure-sensitive adhesive, e.g., acrylic pressure-sensitive adhesive, according to need. Examples of the tackifier include rosin resins, polyterpene resins, coumarone-indene resins, petroleum resins, and terpene-phenol resins. Examples of the crosslinking agent include isocyanate crosslinking agents, epoxy crosslinking agents, oxazoline crosslinking agents, aziridine crosslinking agents, and metal chelate crosslinking agents.

[0038] Examples of the rubber-base pressure-sensitive adhesives include ones comprising as the base polymer a rubbery elastomer such as natural rubber, a styrene/isoprene block copolymer, a styrene/butadiene block copolymer, polyisoprene, polybutene, polyisobutylene, or an ethylene/vinyl acetate copolymer. A tackifier such as, e.g., a rosin resin, polyterpene resin, coumarone-indene resin, petroleum resin, or terpene-phenol resin is incorporated in an appropriate amount into the rubbery elastomer. According to need, a softener such as, e.g., liquid polybutene, mineral oil, liquid polyisoprene, or liquid polyacrylate is further incorporated. As a silicone pressure-sensitive adhesive may be used one comprising polydimethylsiloxane or the like as the main component.

[0039] Various additives including an antioxidant, e.g., butylhydroxytoluene, can be added in appropriate amounts to the pressure-sensitive adhesive.

[0040] The pressure-sensitive adhesive layer 2 may be formed on one or each side of a substrate 1. Techniques for forming the pressure-sensitive adhesive layer 2 are not particularly limited. Examples of usable techniques include: a method in which a solution or emulsion containing a pressure-sensitive adhesive is directly applied to a substrate 1 with a comma coater, top-feed reverse coater, or the like and dried; and a method in which a pressure-sensitive adhesive layer 2 is separately formed on a release film and this release film having the adhesive layer 2 formed thereon is then applied to a substrate 1.

[0041] The thickness of each pressure-sensitive adhesive layer 2 can be determined according to the intended use, etc. In general, it is from 10 to 200 μm . In the case where the pressure-sensitive adhesive tape is to be used as a pressure-sensitive adhesive tape for fixing a liquid-crystal display module unit to a backlight unit in fabricating a liquid-

crystal display to be used in a cell phone or the like, the thickness of each pressure-sensitive adhesive layer is preferably from 10 to 50 μm from the standpoint of thickness and weight reduction.

[0042] Although each pressure-sensitive adhesive layer 2 usually is transparent, it can be colored while or black. Namely, the pressure-sensitive adhesive layer 2 located on the W layer side of the substrate 1 can be colored white, and the pressure-sensitive adhesive layer 2 located on the B layer side of the substrate 1 can be colored black.

[0043] A separator is applied to each pressure-sensitive adhesive layer 2 according to need. Examples of the material constituting the separator include paper and films of synthetic resins such as polyethylene, polypropylene, and poly(ethylene terephthalate). The surface of the separator may have undergone a release treatment such as, e.g., a treatment with a silicone, long-chain alkyl type release agent, or fluorochemical according to need so as to have enhanced releasability from the pressure-sensitive adhesive layer. The thickness of the separator is generally about from 10 to 200 μm , preferably about from 25 to 100 μm .

[0044] The invention will be explained below in greater detail by reference to Examples, but the invention should not be construed as being limited by these Examples in any way. Chromaticity measurements were made with colorimeter CR-200, manufactured by Minolta Co., Ltd.

EXAMPLE 1

[0045] Three colored layers, i.e., a white layer (chromaticity L: 92), a silver layer (chromaticity L: 75), and a black layer (chromaticity L: 25), were formed in this order by printing on one side of a 38 μm -thick white substrate film (poly(ethylene terephthalate); chromaticity L: 92). This film was used as a substrate. The inks used for printing the colored layers were NB-500, manufactured by Dainichiseika Color & Chemicals Mfg. Co., Ltd. Each colored layer was formed in a thickness of 1 μm . A transparent acrylic pressure-sensitive adhesive was applied to each side of the substrate and dried to form a pressure-sensitive adhesive layer having a thickness of 20 μm . Thus, a double-faced pressure-sensitive adhesive tape was obtained.

EXAMPLE 2

[0046] Three colored layers, i.e., a silver layer (chromaticity L: 75), a black layer (chromaticity L: 25), and a black layer (chromaticity L: 25), were formed in this order by printing on one side of a 38 μm -thick white substrate film (poly(ethylene terephthalate); chromaticity L: 92). This film was used as a substrate. The inks used for printing the colored layers were NB-500, manufactured by Dainichiseika Color & Chemicals Mfg. Co., Ltd. Each colored layer was formed in a thickness of 1 μm . A transparent acrylic pressure-sensitive adhesive was applied to each side of the substrate and dried to form a pressure-sensitive adhesive layer having a thickness of 20 μm . Thus, a double-faced pressure-sensitive adhesive tape was obtained.

COMPARATIVE EXAMPLE 1

[0047] A black layer (chromaticity L: 25) was formed as a colored layer by printing on one side of a 38 μm -thick white substrate film (poly(ethylene terephthalate); chromaticity L: 92). This film was used as a substrate. The ink used for printing the colored layer was NB-500, manufactured by Dainichiseika Color & Chemicals Mfg. Co., Ltd. The colored layer was formed in a thickness of 1 μm . A transparent acrylic pressure-sensitive adhesive was applied to each side of the substrate and dried to form a pressure-sensitive adhesive layer having a thickness of 20 μm . Thus, a double-faced pressure-sensitive adhesive tape was obtained.

COMPARATIVE EXAMPLE 2

[0048] A 38 μm -thick white substrate film (poly(ethylene terephthalate); chromaticity L: 92) was used as a substrate. A transparent acrylic pressure-sensitive adhesive was applied to one side of the substrate and dried to form a pressure-sensitive adhesive layer having a thickness of 20 μm . The other side of the substrate was coated with a black acrylic pressure-sensitive adhesive prepared by incorporating a black pigment into that acrylic pressure-sensitive adhesive, and the coating was dried to form a black pressure-sensitive adhesive layer having a thickness of 20 μm (chromaticity L: 25). Thus, a double-faced pressure-sensitive adhesive tape was obtained.

[0049] The double-faced pressure-sensitive adhesive tapes obtained in the Examples and Comparative Examples were tested under the following conditions. In the tests, each pressure-sensitive adhesive tape was illuminated from the white layer side. The results obtained are shown in Table 1.

(Transmittance)

[0050] An integrating sphere type spectral transmittance meter manufactured by Murakami Color Research Laboratory was used to measure the transmittance at a wavelength of 550 nm.

(Reflectance)

[0051] A spectrophotometer manufactured by Shimadzu Corp. was used to measure the diffuse reflectance at a wavelength of 550 nm.

Table 1

	Example 1	Example 2	Comparative Example 1	Comparative Example 2
Transmittance (%)	0	0	0.02	0.08
Reflectance (%)	82	78	69	65

[0052] The pressure-sensitive adhesive tapes obtained in the Examples were ascertained to have an improved reflectance as compared with the pressure-sensitive adhesive tapes of the Comparative Examples. The pressure-sensitive adhesive tapes of the Examples hence bring about an elevated luminance when used for fixing a liquid-crystal display module unit to a backlight unit in fabricating an LCD of the internal/external dual lighting type. Furthermore, the pressure-sensitive adhesive tapes of the Examples had a transmittance of 0%, i.e., satisfactory light-shutting properties. These pressure-sensitive adhesive tapes hence can inhibit the light from the backlight from leaking out to the LCD surface to cause viewing failures.

[0053] While the invention has been described in detail and with reference to specific embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made therein without departing from the spirit and scope thereof.

Claims

1. A pressure-sensitive adhesive tape which comprises a substrate and a pressure-sensitive adhesive layer disposed on at least one side of the substrate,
wherein the substrate comprises colored layers comprising a white layer, a layer of a color other than white and black, and a black layer which are superposed in this order.
2. The pressure-sensitive adhesive tape as claimed in claim 1, wherein the substrate comprises a supporting substrate and colored layers,
the colored layers being a white layer, a layer of a color other than white and black, and a black layer which are superposed in this order from the supporting substrate side.
3. The pressure-sensitive adhesive tape as claimed in claim 2, wherein the supporting substrate is a transparent substrate film.
4. The pressure-sensitive adhesive tape as claimed in claim 2, wherein the supporting substrate is a white substrate film.
5. The pressure-sensitive adhesive tape as claimed in claim 1, wherein the substrate comprises a supporting substrate and colored layers,
the supporting substrate being a white substrate film and the colored layers being a layer of a color other than white and black and a black layer which are superposed in this order from the white substrate film side.
6. The pressure-sensitive adhesive tape as claimed in claim 1, wherein the layer of a color other than white and black is a silver layer.
7. The pressure-sensitive adhesive tape as claimed in claim 1, which is for use in fixing a liquid-crystal display module unit to a backlight unit.

EP 1 386 950 A1

8. A liquid-crystal display comprising a liquid-crystal display module unit and a backlight unit, wherein the display module unit and the backlight unit being fixed to each other with the pressure-sensitive adhesive tape of claim 1.
- 5 9. A pressure-sensitive adhesive tape substrate which comprises colored layers comprising a white layer, a layer of a color other than white and black, and a black layer which are superposed in this order, the substrate being for use in the pressure-sensitive adhesive tape of claim 1.

10

15

20

25

30

35

40

45

50

55

FIG. 1

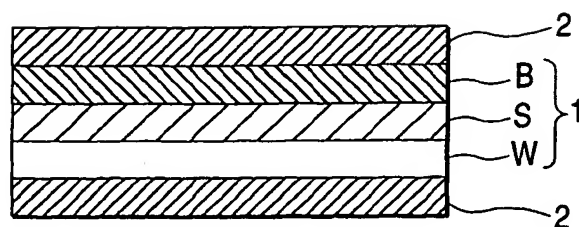


FIG. 2

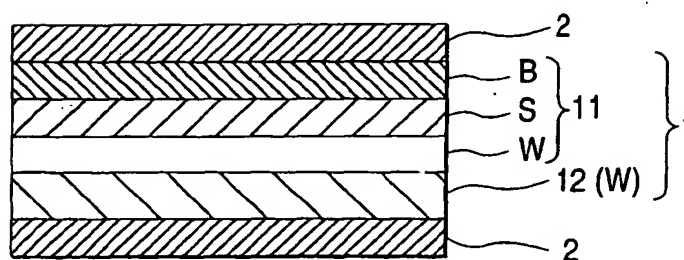


FIG. 3

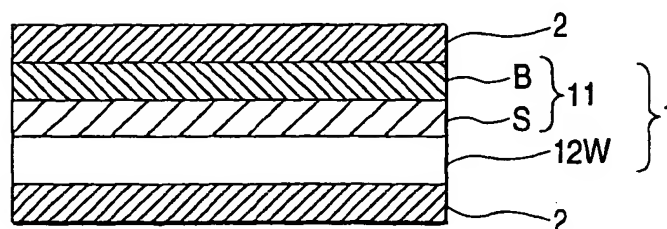


FIG. 4

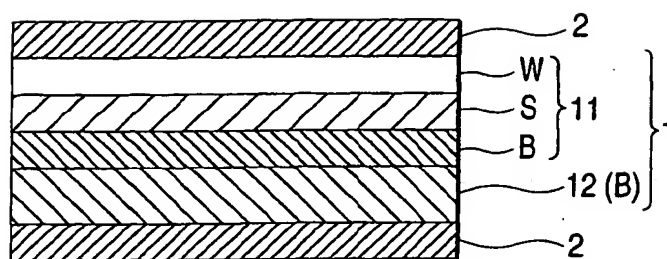


FIG. 5


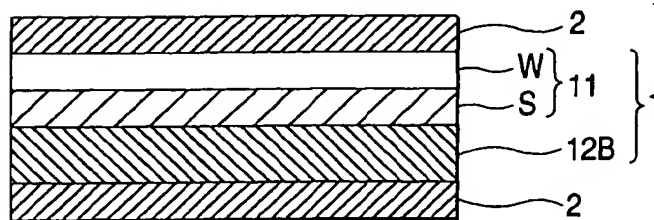


FIG. 6



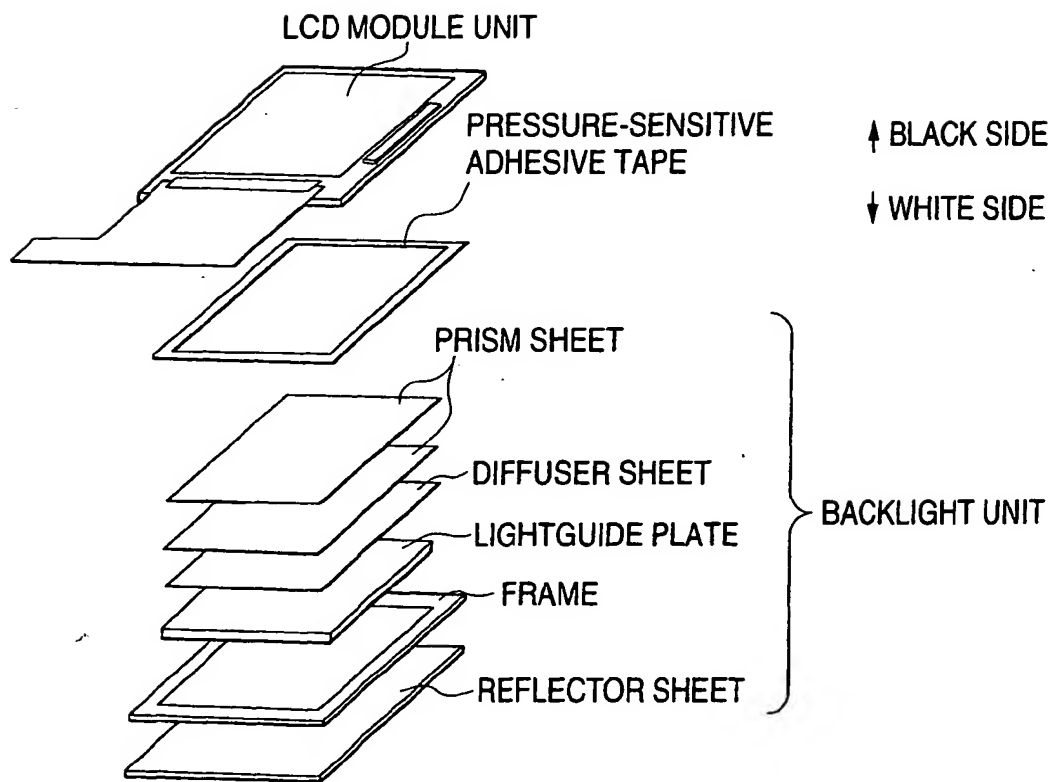

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 01 6899

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 763 584 A (HITACHI CHEMICAL CO LTD ;NIPPON PAINT CO LTD (JP)) 19 March 1997 (1997-03-19) * page 2, line 53 - page 5, line 34 * * abstract; claims 1-20; examples 1-6 *	1-9	C09J7/02 C08K9/12 C09C1/00 C09J133/08
X	WO 89 00106 A (AVERY INTERNATIONAL CORP) 12 January 1989 (1989-01-12) * page 3, line 10 - page 7, line 2 * * abstract; claims 1-73; examples 1-8 *	1-9	
X	US 4 906 421 A (PLAMTHOTTAM SEBASTIAN S ET AL) 6 March 1990 (1990-03-06) * column 2, line 3 - column 6, line 64 * * abstract; claims 1-27; examples 1-6 *	1-9	
X	EP 0 277 426 A (MINNESOTA MINING & MFG) 10 August 1988 (1988-08-10) * page 3, line 26 - page 5, line 38 * * abstract; claims 1-20; examples B-Q *	1-9	
X	US 4 950 537 A (ZIMMERMAN PATRICK G ET AL) 21 August 1990 (1990-08-21) * column 2, line 34 - column 7, line 40 * * abstract; claims 1-9; examples 1-24 *	1-9	TECHNICAL FIELDS SEARCHED (Int.Cl.7) C09J C08K C09C
X	US 5 100 728 A (PLAMTHOTTAM SEBASTIAN S ET AL) 31 March 1992 (1992-03-31) * column 2, line 8 - column 8, line 22 * * abstract; claims 1-44; examples 1-8 *	1-9	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 25 September 2003	Examiner Glomm, B
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons & member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 B2 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 01 6899

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-09-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0763584	A	19-03-1997	JP 3004535 B2	31-01-2000
			JP 7316512 A	05-12-1995
			JP 3004550 B2	31-01-2000
			JP 8143829 A	04-06-1996
			AT 203558 T	15-08-2001
			AU 2454995 A	21-12-1995
			DE 69521894 D1	30-08-2001
			DE 69521894 T2	15-11-2001
			EP 0763584 A1	19-03-1997
			KR 227664 B1	01-11-1999
			ES 2158947 T3	16-09-2001
			WO 9533012 A1	07-12-1995
			US 5643676 A	01-07-1997
WO 8900106	A	12-01-1989	US 4906421 A	06-03-1990
			AU 2081688 A	30-01-1989
			AU 622414 B2	09-04-1992
			AU 631242 B2	19-11-1992
			AU 6199990 A	29-11-1990
			BR 8807118 A	17-10-1989
			CN 1030438 A	18-01-1989
			CN 1063707 A	19-08-1992
			DK 94789 A	18-04-1989
			EP 0329727 A1	30-08-1989
			ES 2010762 A6	01-12-1989
			JP 2500527 T	22-02-1990
			WO 8900106 A1	12-01-1989
			US 5100728 A	31-03-1992
			US 5180635 A	19-01-1993
US 4906421	A	06-03-1990	US 5187235 A	16-02-1993
			AU 2081688 A	30-01-1989
			AU 622414 B2	09-04-1992
			AU 631242 B2	19-11-1992
			AU 6199990 A	29-11-1990
			BR 8807118 A	17-10-1989
			CN 1030438 A	18-01-1989
			CN 1063707 A	19-08-1992
			DK 94789 A	18-04-1989
			EP 0329727 A1	30-08-1989
			ES 2010762 A6	01-12-1989
			JP 2500527 T	22-02-1990
			WO 8900106 A1	12-01-1989
			US 5100728 A	31-03-1992
			US 5180635 A	19-01-1993

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 03 01 6899

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-09-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0277426	A	10-08-1988	BR 8707163 A	16-08-1988
			CA 1334157 C	31-01-1995
			DE 3781136 D1	17-09-1992
			DE 3781136 T2	25-02-1993
			EP 0277426 A1	10-08-1988
			ES 2033887 T3	01-04-1993
			JP 1612178 C	30-07-1991
			JP 2038621 B	31-08-1990
			JP 63175091 A	19-07-1988
			KR 9202782 B1	03-04-1992
			MX 168607 B	01-06-1993
			US 4895745 A	23-01-1990
US 4950537	A	21-08-1990	CA 2008017 A1	22-08-1990
			DE 4002834 A1	23-08-1990
			JP 2248483 A	04-10-1990
			EP 0324242 A2	19-07-1989
			JP 1217092 A	30-08-1989
US 5100728	A	31-03-1992	US 4906421 A	06-03-1990
			AU 2081688 A	30-01-1989
			AU 622414 B2	09-04-1992
			AU 631242 B2	19-11-1992
			AU 6199990 A	29-11-1990
			BR 8807118 A	17-10-1989
			CN 1030438 A	18-01-1989
			CN 1063707 A	19-08-1992
			DK 94789 A	18-04-1989
			EP 0329727 A1	30-08-1989
			ES 2010762 A6	01-12-1989
			JP 2500527 T	22-02-1990
			WO 8900106 A1	12-01-1989
			US 5180635 A	19-01-1993

EPO FORM P/0159

For more details about this annex : see Official Journal of the European Patent Office, No 12/82